


● ELECTRO-ZINC COATED GUTTER

● VFL/VF 35

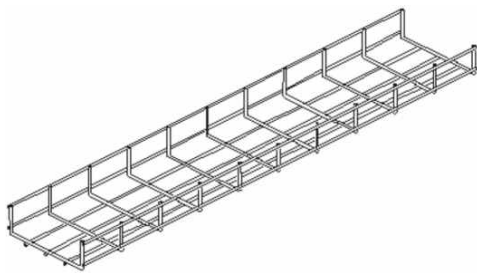


Characteristics

- Paths for cables on electrowelded rods
- Height of the tab: 35mm
- With available widths ranging from 50mm to 550mm

Ø (mm)	(mm)
3,5-5,0	VFL 65x30
3,5-5,0	VFL 100x35
3,5-5,0	VFL 150x35
3,5-5,0	VFL 200x35
3,5-5,0	VFL 250x35
5,0	VF 350x36
5,0	VF 450x36
5,0	VF 550x36

● VFL/VF60

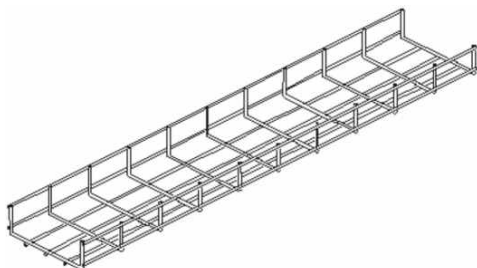

Characteristics

- Paths for cables on electrowelded rods
- Height of the tab: 60mm
- With available widths ranging from 50mm to 600mm

Ø (mm)	(mm)
3,5-5,0	VFL 50x60
3,5-5,0	VFL 100x60
3,5-5,0	VFL 150x60
3,5-5,0	VFL 200x60
5,0	VF 300x60
5,0	VF 400x60
5,0	VF 500x60
5,0	VF 600x60