


13. Transportation and Protection of Cables



● COLD PERFORATED METAL GUTTER - SENDZIMIR

● KBS-35

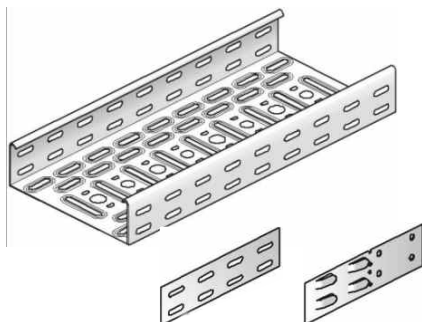


Characteristics

- Supplied in 3 meter length
- Height of the tab: 35mm
- Width: 50mm to 600mm
- V35 quick assembly joint
- V35 * 200 reinforced assembly joint

Thickness (mm)	Dimensions (mm)
0,75	KBS 50x35
0,75	KBS 75x35
0,75	KBS 100x35
0,75	KBS 150x35
0,75	KBS 200x35
0,75	KBS 250x35
0,75	KBS 300x35
1,00	KBS 400x35
1,00	KBS 500x35
1,00	KBS 600x35
1,00	V 35
1,00	V 35*200

● KBSI-60

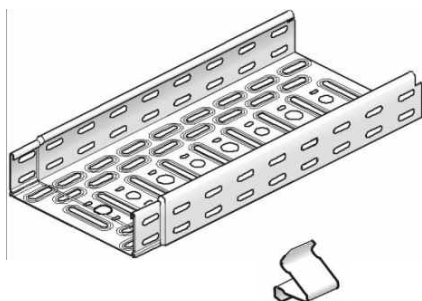

Characteristics

- Supplied in 3 meter length
- Height of the tab: 60mm
- Width: 75mm to 600mm
- KBV quick assembly joint

Thickness (mm)	Dimensions (mm)
0,75	KBSI 75x60
0,75	KBSI 100x60
0,75	KBSI 150x60
0,75	KBSI 200x60
0,75	KBSI 250x60
0,75	KBSI 300x60
1,00	KBSI 400x60
1,00	KBSI 500x60
1,00	KBSI 600x60
-	KBV


● COLD PERFORATED METAL GUTTER

● D COVERS

Characteristics

- Blind cover for metal gutters
- For fixing to metal gutters apply the DCO accessory
- For fixing to accessories apply the DCL accessory

Length (mm)	Width (mm)
3000	D50
2000	D75
2000	D100
2000	D150
2000	D200
2000	D250
2000	D300
2000	D400
2000	D500
2000	D600
-	DCO
-	DCL

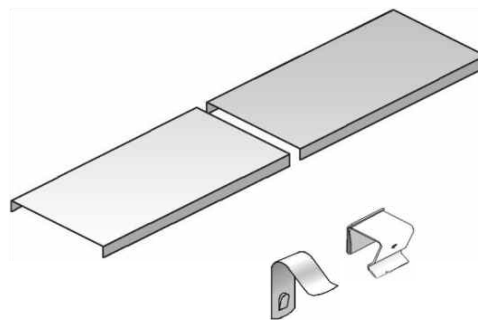


● AZH ACCESSORY - MULTIFUNCTION

Characteristics

- This accessory replaces the plane angles, T's and crosses

Reference
AZH 35
AZH 60
AZH 85
AZH 110




● SUPPORT FOR MPV BOXES

Characteristics


- For clamping, use the VMK 6 * 10 or KBV accessory

Reference
MPV



● ELECTRO-ZINC COATED GUTTER

● VFL/VF 35

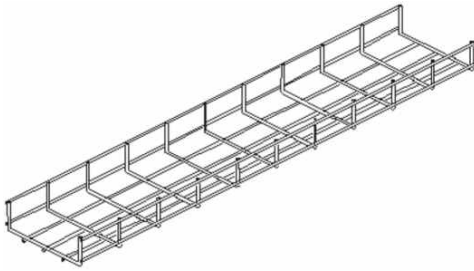


Characteristics

- Paths for cables on electrowelded rods
- Height of the tab: 35mm
- With available widths ranging from 50mm to 550mm

Ø (mm)	(mm)
3,5-5,0	VFL 65x30
3,5-5,0	VFL 100x35
3,5-5,0	VFL 150x35
3,5-5,0	VFL 200x35
3,5-5,0	VFL 250x35
5,0	VF 350x36
5,0	VF 450x36
5,0	VF 550x36

● VFL/VF60

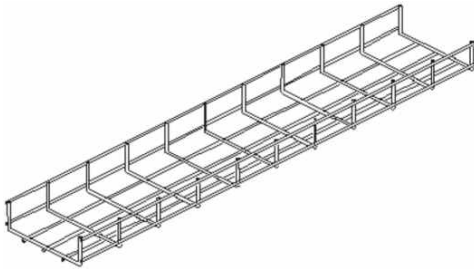

Characteristics

- Paths for cables on electrowelded rods
- Height of the tab: 60mm
- With available widths ranging from 50mm to 600mm


Ø (mm)	(mm)
3,5-5,0	VFL 50x60
3,5-5,0	VFL 100x60
3,5-5,0	VFL 150x60
3,5-5,0	VFL 200x60
5,0	VF 300x60
5,0	VF 400x60
5,0	VF 500x60
5,0	VF 600x60

● ELECTRO-ZINC COATED GUTTER

● SIDE / FIXATION JOINT - VFK

Characteristics

- Accessory for side joint and fixation joint for curves



Reference

VFK

● QUICK-JOINTING PLATE

Characteristics

- Quick-jointing plate for VF/VFL 35/60
- No need to use any tool



Reference


KPVF

KPVFL 35

● SUPPORT - VFMM

Characteristics

- Support for junction boxes or support rails
- VFMM - Use on 60mm rails
- VFMM 35 - Use on 35mm rails



Reference

VFMM

VFMM 35

● ELECTRO-ZINC COATED GUTTER

● FIXING CLIP - VFCL



Characteristics

- Accessory for fixing electrowelded gutters to brackets

Reference

VFCL

● ACCESSORIES

● TIM ROD



Characteristics

- Threaded rod supplied in lengths of 1 or 2 meters

Reference

TIM 6

TIM 8

TIM 10

TIM 12

● L OMEGA CONSOLE



Characteristics

- Wall console

Reference

L OMEGA 100

L OMEGA 200

L OMEGA 300

L OMEGA 400


L OMEGA 500

● ACCESSORIES

● ENHANCED CONSOLE - WKS

Characteristics

- Reinforced wall console for use in all cable trays




Reference
WKS 100
WKS 150
WKS 200
WKS 250
WKS 300
WKS 350
WKS 400
WKS 500

● SCREW + NUT + VMK

Characteristics

- Low block screw and nut set for use in drilled cable paths



Reference
VMK 6x10
VMK 8x15