


● RESIN BOXES - IN LINE JOINTS

Features

- Application of aluminum or copper cables
- Kit consists of mold and resin / hardener required for implementation

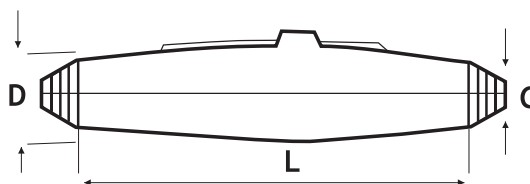


| Dimensions (mm) | | | Sections (mm ²) | Reference |
|-----------------|-----|----------|--------------------------------|----------------|
| L | D | C | | |
| 160 | 30 | 10 - 21 | 4x1,5 a 4x4 | S4 (MZ00) |
| 210 | 38 | 10 - 30 | 4x4 a 4x10 | S10 (M11) |
| 310 | 52 | 17 - 38 | 4x10 a 4x25 | S25 (M12) |
| 370 | 66 | 20 - 36 | 4x25 a 4x70 | S50 (M13) |
| 600 | 79 | 30 - 49 | 4x50 a 4x150 | S120 (M14/M15) |
| 780 | 125 | 48 - 79 | 4x120 a 4x240 | S240 (M16) |
| 1240 | 157 | 55 - 103 | 4x240 a 4x400 | S400 (M17) |

● RESIN BOXES - DERIVATION JOINTS

Features

- Application of aluminum or copper cables
- Kit consists of mold and resin / hardener required for implementation
- Polyurethane Resin



| Dimensions (mm) | | | Cable 0,6/1kv - N° Condu. X section(mm ²) | | Reference |
|-----------------|---------|---------|---|--------------|----------------|
| L | D | C | Main | Derivated | |
| 190 | 5 - 21 | 5 - 21 | 4x1,5 a 4x4 | 4x1,5 a 4x4 | SB4 (Y0) |
| 220 | 10 - 30 | 10 - 30 | 4x4 a 4x16 | 4x1,5 a 4x16 | SB10 (Y1) |
| 270 | 18 - 38 | 18 - 38 | 4x10 a 4x35 | 4x1,5 a 4x35 | SB25 (Y2) |
| 400 | 30 - 50 | 20 - 40 | 4x50 a 4x150 | 4x1,5 a 4x70 | SB120 (Y4/ Y5) |
| 500 | 45 - 60 | 20 - 40 | 4x12 a 4x30 | 4x1,5 a 4x70 | SB240 (Y6) |

● RESIN PACKAGES

Features

- Polyurethane Resin.
- Application in power cable, telephone and signal.
- High dielectrical characteristics

| Volume (ml) | Weight (gr) | Reference |
|-------------|-------------|---------------|
| 75 | 107 | RP0 (EG00) |
| 175 | 250 | RP1 (EG1/2) |
| 300 | 429 | RP2 (EG1) |
| 550 | 787 | RP3 (EG2) |
| 900 | 1287 | RP4 (EG4) |
| 2000 | 2860 | RP5 (EG7) |
| 3000 | 4290 | RP6 (EGD3600) |

