

● LUMINAIRES

Characteristics


- Closed luminaire for urban areas and road networks
- Reflector in high purity aluminum, polished and anodized
- Electrical accessories block compartment in cast aluminum
- Bonnet in polyamide with fiberglass
- Polycarbonate diffuser
- Recommended height: 6 to 10 meters
- Vertical or horizontal mounting a 42mm or 60mm arm
- IP43 Electrical compartment
- IP65 Optical compartment



Description	Reference
Luminaire Bracara 150W	BRA-150W
Luminaire Bracara 250W	BRA-250W

Characteristics

- Arms for street lighting

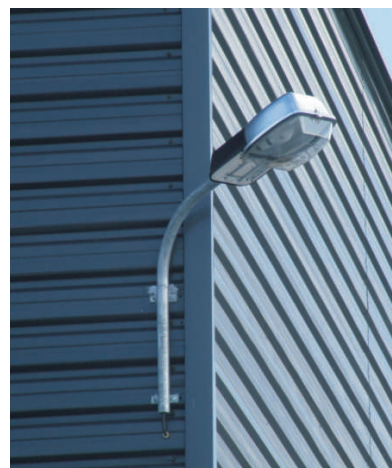

Description	Weight (kg)	Reference
Street light arm 1 1/4" with tab 750x750	3,300	42.1500P
Street light arm 1 1/4" with tab 1250x750	4,400	42.2000P
Street light arm 2" with tab 750x750	6,200	60.1500P
Street light arm 2" with tab 1250x750	8,300	60.2000P
Clamp 1 1/4" M12 cold	0,460	Abra.12.42
Clamp 1 1/4" M16 cold	0,620	Abra.16.42
Clamp 2" M16 cold	0,800	Abra.16.60