


● COPPER BRAIDS

Features

- Tin copper braid 6, 10, 16, 25, 35, 50, 70mm² in rolls of 25 meters




Dimensions (mm) length x thickness x width	Section (mm ²)	Reference
6 x 15,0 x 25000	6	TCE 6
10 x 1,5 x 25000	10	TCE 10
16 x 2,0 x 25000	16	TCE 16
25 x 2,0 x 25000	25	TCE 25
25 x 3,0 x 25000	35	TCE 35
30 x 3,5 x 25000	50	TCE 50
30 x 4,0 x 25000	70	TCE 70

Features

- Braid of copper 16mm² tin-planted, with soldature block and eyelet at one end for application in ground and shielding connection of the conductors electrical cables LV and MV.

Dimensions (mm) length x thickness x width	Section (mm ²)	Reference
15 x 2 x 500	16	TCA16500
15 x 2 x 700	16	TCA16700

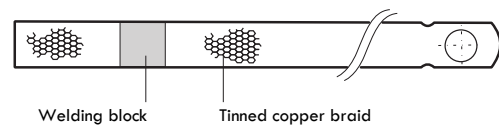

● SPRING CONSTANT PRESSURE

Features

- Spiral spring to allow contact between the copper braid the tape and metal mesh in implementing of terminal boxes and Medium voltage joint.
- Easy application avoiding the use of welds or afileamentos
- Material: Stainless steel DIN 1, 4310



Application (mm)		Dimensions (mm)		Lenght	Reference
Min.	Máx	b	d		
12	20	13	10	280	EPPA 034 - A
17	28	13	14	400	EPPA 034 - B
25	40	13	20	570	EPPA 034 - C
36	60	13	30	850	EPPA 034 - D
17	29	25	14	570	EPPA 034 - E
30	39	25	22	700	EPPA 034 - F
40	60	25	30	950	EPPA 034 - G
50	75	30	38	1100	EPPA 034 - H
50	75	30	38	1350	EPPA 034 - I
12	20	13	10	400	EPPA 034 - K
57	85	30	45	1350	EPPA 034 - L
33	45	25	25	850	EPPA 034 - M
25	34	25	19	650	EPPA 034 - N
85	110	30	70	1500	EPPA 034 - O

