



•FOR HYDRAULIC PRESS Y-35 / Y-39



Features

- Application: Terminals and sectoral joints aluminum sector 90, 4 conductors
- Spiking by punching


Section mm ²	Puncture	Matrix
16	UP016A4	UNA-1
25	UP025A4	
35	UP035A4	
50	UP050A4	
70	UP070A4	
95	UP095A4	UNA-4
120	UP120A4	
150	UP150A4	
185	UP185A4	
240	UP240A4	
300	UP300A4	

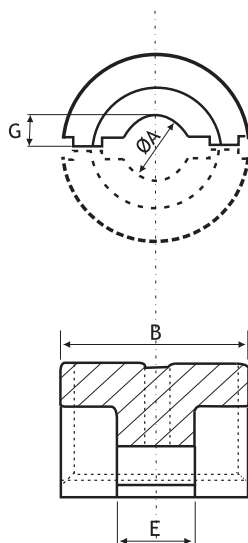

Features

- Application: Terminals and connectors round B.T.
- Circumferential crimping

Section mm²	Dimensions mm			E	Reference
	A	G	B		
10	6,30	3,10	34,9	10,70	U8 CART
16	7,20	3,55	34,9	14,30	U6 CART
25	9,10	4,54	34,9	16,30	U4 CART
35	11,20	5,51	34,9	19,00	U2 CART
50	12,80	6,38	25,4	10,70	U25 ART
70	14,75	7,19	34,9	12,40	U25 ART
95	18,15	9,04	34,9	14,00	U28 ART
120	19,80	9,83	34,9	14,00	U29 ART
150	21,60	10,74	34,9	18,15	U30 ART
185	23,40	8,74	34,9	10,00	U31 ART
240	27,90	11,00	34,9	10,65	U34 ART
300	31,30	11,65	13,0	13,00	U36 ART



Features

- Application: Terminals and connectors copper
- Hexagonal crimping

Section mm ²	Matrix
10	U010BGE1 T
16	U016BGE1 T
25	U025BGE1 T
35	U035BGE1 T
50	U050BGE1 T
70	U070BGE1 T
95	U095BGE1 T

Section mm ²	Matrix
120	U120BGE1 T
150	U150BGE1 T
185	U185BGE1 T
240	U240BGE1 T
300	U300BGE1 T
400	U400BGE1 T